


TECHNICAL DATA SHEET

Double-sided DS-CPL panel in CPA29 profile

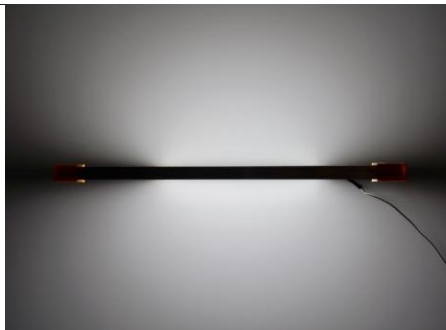

Maximum dimensions / thickness [m]	1200 x 800 / 11
Material and frame	Anodized aluminium, silver
Weight [kg]	9,84 / m ²
Voltage [V]	12 / 24
Input power [W]	from 26 W / for each m of illuminated edge
Electric cabel	Section: 2 x 0.22mm ² , length: 1.5 m, w/o plug
Type of light source	Flexible led strip 4mm of width
Illumination	One or two longer edges (UNO or DUO)
Colour temperature [K]	3000,4000,5000,6500 (others upon order)
Luminous flux [lm]	from 4000 /each m of illuminated edge
CRI	min. 85 (depends on led strip type used)
IP rating	IP40 (for indoor use only)
Light diffusion medium	Two laser engraved PMMA panels CPM ³

1. Detailed information on CPA29 profile, based upon the DS-CPL is assembled, is available at: <https://products.crystal-panel.com>.

2. The presented parameters apply to standard LEDs with a supply voltage of 12V. Full offer of LED strips available in the offer can be found at: <https://products.crystal-panel.com>

3. Available separately, technical details can be found at: <https://products.crystal-panel.com>

